
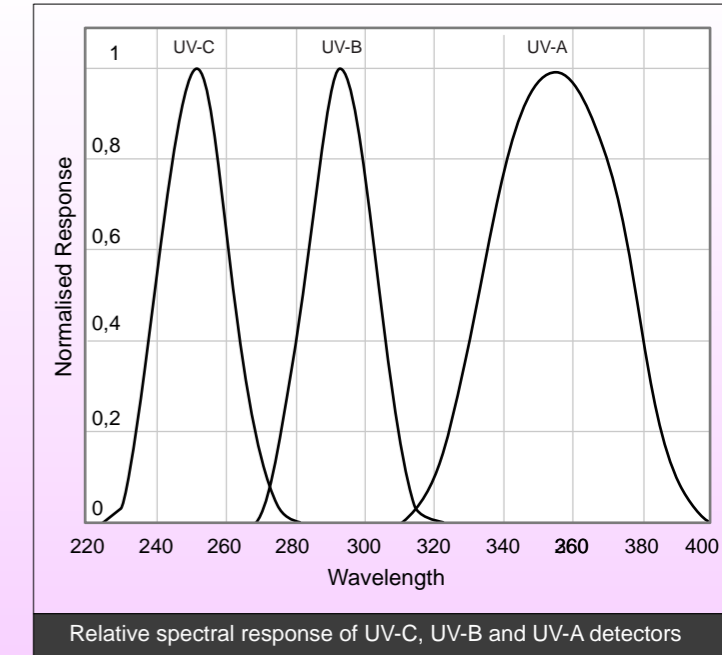


The GOLDILUX range of ultraviolet meters are robust handheld instruments, developed for measuring UV-A, UV-B and UV-C levels.

Meters are available for UV-A as a dedicated unit and as a system of a readout with a remote probe for UV-A, UV-B and UV-C which are interchangeable and can be plugged into the UV-meter readout.

The highly stable UV-enhanced silicon detectors have superb amplification, ensuring excellent linearity and stability.

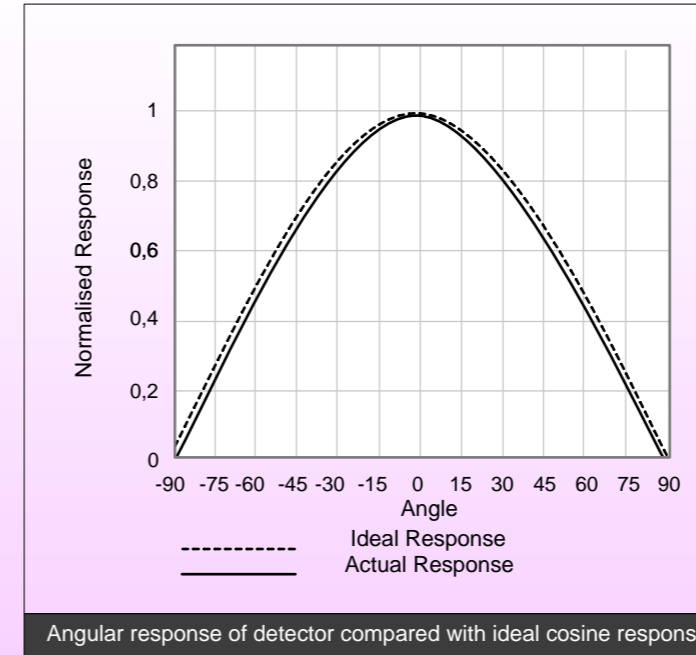

Specifications

Measuring functions:	Irradiance
Measuring range:	0,1 to 200 000,0 $\mu\text{W}/\text{cm}^2$, depending on model
Accuracy:	5 to 15% uncertainty (depending on UV Type)
Readout:	4 1/2 digit LCD display
Temperature range:	0 to 50°C
Hold function:	Hold button on meter
Power source:	One PP3 9V battery, preferable alkaline.
Battery life:	Approximately 180 hours for alkaline battery
Dimensions:	150 x 80 x 35 mm (basic unit)
Mass:	Display unit: 220 g (with battery), Probe: 85 g
Accessories:	Plug-in remote detectors, packing case, instruction manual
Calibration:	Standard with accredited calibration certificate.

Features

- Robust, lightweight, handheld
- Excellent stability
- Excellent linearity
- Versatility through interchangeable remote detectors
- Wide measurement range of irradiance
- Digital display
- Hold function
- Standard with calibration certificate, legal backing for measurements
- Powered by single replaceable battery
- One year manufacturer's guarantee

Supplier Information

Contact Number: (012) 349-5191
 Email Address: info@marmit.co.za
 Physical Address: CSIR Campus
 BLDG 33
 ROOM S111
 Pretoria